



Foxboro™ DCS

FBM207/b/c Voltage Monitor/Contact Sense Input Modules

PSS 41H-2S207

Product Specification

August 2019



Legal Information

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this guide are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

This guide and its content are protected under applicable copyright laws and furnished for informational use only. No part of this guide may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the guide or its content, except for a non-exclusive and personal license to consult it on an "as is" basis. Schneider Electric products and equipment should be installed, operated, serviced, and maintained only by qualified personnel.

As standards, specifications, and designs change from time to time, information contained in this guide may be subject to change without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this material or consequences arising out of or resulting from the use of the information contained herein.

Overview

Discrete inputs can be sensed across all the usual voltage levels found in industrial facilities. The FBM207/b/c uses one of the several termination assemblies to match to the externally powered voltage level. In cases where the inputs are integral to the plant's control scheme, the FBM207/b/c may be installed as a redundant pair with standard control blocks used to manage the redundancy.

The FBM207/b/c Voltage Monitor/Contact Sense Input Module functions as a 16-channel DC voltage monitor or 16-channel contact sensor. Each channel accepts a 2-wire input from a dc voltage source (FBM207) or pair of contacts or solid state switches (FBM207b/ FBM207c).

Associated termination assemblies (TAs) support discrete input signals at voltages of 60 V dc, 120 V ac/125 V dc, or 240 V ac. For voltages higher than 60 V dc, the TAs have additional signal conditioning hardware that provides voltage attenuation and optical isolation.

The module is available in three distinct types, and each type with its associated TA supports discrete inputs as shown below:

FBM207	Provides voltage monitoring at: <ul style="list-style-type: none">• 60 V dc• 120 V ac/125 V dc• 240 V ac Provides switch inputs with: <ul style="list-style-type: none">• External 120 V ac/125 V dc• External 240 V ac
FBM207b	24 V dc Contact Sense
FBM207c	48 V dc Contact Sense

Each discrete input is galvanically isolated from other channels and ground. Group isolated when used with external excitation.

The module performs signal conversion required to interface electrical input signals from field sensors to the redundant module Fieldbus. In addition, it executes programs for Discrete Input, Ladder Logic, Pulse Count, and Sequence of Events, with configurable options of Input Filter Time.

The module can be used as a single unit, or as a redundant pair (two FBM207s). When used as a redundant pair, the modules combine to provide redundancy at the Fieldbus Module (FBM) level, with field input signals received from one common termination assembly though a redundant adapter affixed to the baseplate of the FBM. The input current for redundant modules is doubled. A redundant digital input block in the Foxboro DCS Control Software validates each input in conjunction with information to/from the module, and selects the input with the highest quality for processing in the control strategy.

In a redundant configuration, contact sense power from each module is diode OR'd together in the redundant adapter to help assure redundant power.

A redundant contact input function block, CINR, is used for each redundant pair of inputs. The CINR block handles input reads and initialization logic for the redundant channels. On each execution cycle of the CINR block, identical reads are sent to both modules, fully exercising the fieldbus and the logic circuitry of each module.

Features

- FBM207 supports 16 discrete input signals at voltages of:
 - 15 to 60 V dc - voltage monitoring
 - 120 V ac/125 V dc - voltage monitoring or switch inputs
 - 240 V ac - voltage monitoring or switch inputs
- Each input is galvanically isolated, and group isolated with external excitation
- Single or redundant modules
- Rugged design suitable for enclosures in Class G3 (harsh) environments
- Executes programs for Discrete Input, Ladder Logic, Pulse Count, and Sequence of Events with configurable Input Filter Time option
- Termination Assemblies (TAs) for locally or remotely connecting field wiring to FBM207/b/c
- Termination Assemblies for per channel internally loop powered devices
- Various Termination Assemblies (TAs) have additional signal conditioning hardware that provides voltage attenuation and optical isolation

Standard Design

FBM207/b/c has a rugged extruded aluminum exterior for physical protection of the circuits.

Enclosures specially designed for mounting the FBMs provide various levels of environmental protection, up to harsh environments (Class G3), per ISA Standard S71.04.

Visual Indicators

Light-emitting diodes (LEDs) incorporated into the front of the module provide visual indication of the operational status of the FBM, as well as the discrete states of the individual input points.

Easy Removal/Replacement

The module can be removed or replaced without removing field device termination cabling, power, or communication cabling.

When redundant, either module may be replaced without upsetting field input signals to the good module. The module can be removed/replaced without removing field device termination cabling, power, or communications cabling.

Sequence of Events

The Sequence of Events (SOE) software package (for use with I/A Series® software V8.x and Control Core Services software v9.0 or later) is used for acquisition, storage, display, and reporting of events associated with digital input points in a control system. SOE, using the optional GPS based time synchronization capability, supports data acquisition across control processors at intervals of up to one millisecond, depending on the signal source.

Refer to *Sequence of Events* (PSS 31S-2SOE) to learn more about this package, and to *Time Synchronization Equipment* (PSS 41H-4TIMESNC) for a description of the optional time synchronization capability.

I/A Series systems with software earlier than V8.x can support SOE through ECB6 and EVENT blocks. However, these systems do not support GPS time synchronization and use a timestamp sent by the Control Processor which is only accurate to the nearest second and is not synchronized between different Control Processors.

Redundant Modules in Foxboro DCS HMI

The redundant pair of modules appear as two independent modules to system management software applications, such as Foxboro DCS System Manager, and System Manager/Display Handler (SMDH). The functional redundancy for these modules is provided by their associated control blocks.

Fieldbus Communication

A Fieldbus Communications Module or a Control Processor interfaces to the redundant 2 Mbps module Fieldbus used by the FBMs. The FBM accepts communication from either path (A or B) of the 2 Mbps Fieldbus. If one path is unsuccessful or is switched at the system level, the module continues communication over the active path.

Modular Baseplate Mounting

The module mounts on a DIN rail mounted baseplate, which accommodates up to four or eight FBMs. The Modular Baseplate is either DIN rail mounted or rack mounted, and includes signal connectors for redundant module Fieldbus, redundant independent DC power, and termination cables.

Redundant modules must be located in odd and even adjacent positions on the baseplate (positions 1 and 2, 3 and 4, 5 and 6, or 7 and 8). To achieve the redundancy, a redundant adapter module is placed on the two adjacent baseplate termination cable connectors to provide a single termination cable connection. A single termination cable connects from the redundant adapter to the associated TA.


Overcurrent Protection

Field power, for contacts or solid-state switches, is current limited.

Termination Assemblies

Field I/O signals connect to the FBM subsystem via DIN rail mounted TAs. The TAs used with the FBM207/b/c are described in *Termination Assemblies and Cables*, page 11.

Functional Specifications

Communication	Communicates with its associated FCM or FCP via the redundant 2 Mbps module Fieldbus.
Input	16 isolated and independent channels
Accuracy	Pulse Count: No missing pulses for pulse rate 0 to 250 Hz
Filter/Debounce Time	Configurable (No Filtering, 4, 8, 16, or 32 ms) NOTE: Digital filtering available for 200 Series FBM or competitive migration modules with version 1.25H or later firmware.
Voltage Monitor Function - Input	<ul style="list-style-type: none"> Input: Logic One, On-State Voltage: 15 to 60 V dc Logic Zero, Off-State Voltage: 0 to 5 V dc Current: 1.4 mA (typical) at 5 to 60 V dc Source Resistance Limits: Logic One, On-State: 1 kΩ (maximum) at 15 V dc Logic Zero, Off-State: 100 kΩ (minimum) at 60 V dc
Contact Sensor Function - Input	<ul style="list-style-type: none"> Range (Each Channel): Contact open (off) or closed (on) Open-Circuit Voltage: <ul style="list-style-type: none"> FBM207b: 24 V dc \pm15% FBM207c: 48 V dc \pm15%
Short-Circuit Current	3.2 mA (typical)
Logic One, ON-State Resistance	1.0 k Ω (maximum)
Logic Zero, OFF-State Resistance	100 k Ω (minimum)
Isolation	<p>Each channel is galvanically isolated from all other channels and ground. The module withstands, without damage, a potential of 600 V ac applied for one minute between any channel and ground, or between a given channel and any other channel.</p> <div style="background-color: black; color: white; text-align: center; padding: 5px;">  DANGER </div> <div style="border: 1px solid black; padding: 5px;"> <p>HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH</p> <p>This does not imply that these channels are intended for permanent connection to voltages of these levels. Exceeding the limits for input voltages, as stated elsewhere in this specification, violates electrical safety codes and may expose users to electric shock.</p> <p>Failure to follow these instructions will result in death or serious injury.</p> </div>

Power Requirements	<ul style="list-style-type: none"> • Input Voltage Range (Redundant): 24 V dc +5%, -10% • Consumption: <ul style="list-style-type: none"> ◦ FBM207 3 W ◦ FBM207b 4 W ◦ FBM207c 5 W • Heat Dissipation: <ul style="list-style-type: none"> ◦ FBM207 5.5 W (including contribution from field power supply) ◦ FBM207b 4 W ◦ FBM207c 5 W
Loop Power Supply Protection	Current limited at 3.2 mA (typical)
Field Terminations Functional Specifications	Refer to <i>Termination Assemblies and Cables</i> , page 11.
Calibration Requirements	Calibration of the module and termination assembly is not required.
Regulatory Compliance: Electromagnetic Compatibility (EMC)	<ul style="list-style-type: none"> • <i>European EMC Directive 2004/108/EC (Prior to April 20, 2016) and 2014/30/EU (Beginning April 20, 2016):</i> Meets: EN61326-1:2013 Class A Emissions and Industrial Immunity Levels
Product Safety — Low Voltage Inputs	<ul style="list-style-type: none"> • <i>Underwriters Laboratories (UL) for U.S. and Canada:</i> UL/UL-C listed as suitable for use in UL/ULC listed Class I, Groups A-D; Division 2; temperature code T4 enclosure based systems when connected to specified Foxboro DCS processor modules. Communications circuits also meet the requirements for Class 2 as defined in Article 725 of the National Electrical Code (NFPA No.70) and Section 16 of the Canadian Electrical Code (CSA C22.1). For more information, see <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). • <i>European Low Voltage Directive 2006/95/EC (Prior to April 20, 2016) and 2014/35/EU (Beginning April 20, 2016) and Explosive Atmospheres (ATEX) directive 94/9/EC (Prior to April 20, 2016) and 2014/34/EU (Beginning April 20, 2016):</i> DEMKO certified as Ex nA IIC T4 for use in certified Zone 2 enclosure when connected to specified processor modules as described in the <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA).
RoHS Compliance	Complies with European RoHS Directive 2011/65/EU, including amending Directives 2015/863 and 2017/2102.
Marine Certification	ABS Type Approved and Bureau Veritas Marine certified for Environmental Category EC31.

Environmental Specifications

	Operating	Storage
Temperature	<ul style="list-style-type: none">• FBM207/b/c: -20 to +70°C (-4 to +158°F)• Termination Assembly - PA: -20 to +70°C (-4 to +158°F)	-40 to +70°C (-40 to +158°F)
Relative Humidity	5 to 95% (noncondensing)	5 to 95% (noncondensing)
Altitude	-300 to +3,000 m (-1,000 to +10,000 ft)	-300 to +12,000 m (-1,000 to +40,000 ft)
Vibration	7.5 m/s ² (0.75 g) from 5 to 500 Hz	
Contamination	Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.	

NOTE: The environment ranges can be extended by the type of enclosure containing the module. Refer to the PSS applicable to the enclosure to be used.

Physical Specifications

Mounting	<ul style="list-style-type: none"> Module: FBM207/FMB207b/FBM207c mounts on a Modular baseplate. Baseplate can be mounted on a DIN rail (horizontally or vertically), or horizontally on a 19-inch rack using a mounting kit. Redundant modules must be located in odd and even adjacent positions on the baseplate (positions 1 and 2, 3 and 4, 5 and 6, or 7 and 8). See <i>Standard 200 Series Baseplates</i> (PSS 41H-2SBASPLT) for details. Termination Assemblies: The TA mounts on a DIN rail and accommodates multiple DIN rail styles including 32 mm (1.26 in) and 35 mm 1.38 in).
Weight	<ul style="list-style-type: none"> Module: 185 g (6.5 oz) approximate Termination Assemblies: <ul style="list-style-type: none"> <i>Compression Type</i>: 127 mm (5.02 in) – 272 g (0.60 lb, approximate) 146 mm (5.75 in) – 317 g (0.7 lb, approximate) <i>Ring Lug Type</i>: 198 mm (7.78 in) – 400 g (0.90 lb, approximate) 216 mm (8.51 in) – 440 g (1.0 lb, approximate)
Dimensions - Module	<ul style="list-style-type: none"> Height: 102 mm (4 in), 114 mm (4.5 in) including mounting lugs Width: 45 mm (1.75 in) Depth: 104 mm (4.11 in)
Dimensions - Termination Assemblies	<ul style="list-style-type: none"> Compression Screw: Refer to <i>Dimensions - Nominal</i>, page 15. Ring Lug: Refer to <i>Dimensions - Nominal</i>, page 15.
Part Numbers	<ul style="list-style-type: none"> Module: <ul style="list-style-type: none"> FBM207: RH914TD FBM207b: RH914WH FBM207c RH917GY Termination Assemblies: Refer to <i>Termination Assemblies and Cables</i>, page 11. Redundant Adapter: RH926ZY

Termination Cables	<ul style="list-style-type: none"> • Cable Lengths: Up to 30 m (98 ft) • Cable Materials: Polyurethane or Low Smoke Zero Halogen (LSZH) • Termination Cable Type: Type 4 — Refer to <i>Table 2, page 14</i> • Cable Connection: 37-pin male D-subminiature
Construction - Termination Assembly	<ul style="list-style-type: none"> • Material: Polyamide (PA), compression Polyamide (PA), ring lug • Family Group Color: Dark blue - discrete • Terminal Blocks: Inputs - 2 tiers, 16 positions Excitation - 2 tiers, 4 positions
Field Termination Connections	<ul style="list-style-type: none"> • Compression Accepted Wiring Sizes: <ul style="list-style-type: none"> ◦ Solid/Stranded/AWG: 0.2 to 4 mm²/0.2 to 2.5 mm²/24 to 12 AWG ◦ Stranded with Ferrules: 0.2 to 2.5 mm² with or without plastic collar • Ring Lug Accepted Wiring Sizes: #6 size connectors (9.5 mm (0.375 in)) 0.5 to 4 mm²/22 AWG to 12 AWG

Termination Assemblies and Cables

Field I/O signals connect to the FBM subsystem via DIN rail mounted TAs. Multiple types of TAs are available with FBMs to provide I/O signal connections, signal conditioning, optical isolation from signal surges, external power connections, and/or fusing for protection of the FBM and/or field device as required by the particular FBM. Since these features are built into the termination assemblies (where required), in most applications there is no need for additional termination equipment for field circuit functions such as circuit protection or signal conditioning (including fusing and power distribution).

The termination assembly can be used with a single FBM207 or with a redundant pair (two FBM207s).

The DIN rail mounted termination assemblies connect to the FBM subsystem baseplate by means of removable termination cables. When used with a redundant module pair, the termination assembly is connected to the baseplate using a redundant adapter (RH926ZY). The DIN rail mounted TAs connect to the redundant adapter by means of a removable termination cable.

The cables for both single and redundant configurations are available in a variety of lengths, up to 30 meters (98 ft), allowing the termination assemblies to be mounted in either the enclosure or in an adjacent enclosure. Refer to *Table 2, page 14* for termination cable part numbers and specifications.

Discrete Inputs

Termination assemblies with discrete inputs support sixteen 2-wire discrete input signals at passive low voltage levels of less than 60 V dc and active high voltage levels of 125 V dc, 120 V ac, or 240 V ac. Active termination assemblies support input signal conditioning for FBMs. To condition signals, these termination assemblies may provide optical isolation, current limiting, noise reduction, voltage attenuation, or optional terminal blocks to connect externally supplied excitation voltage.

Low Voltage Discrete Inputs

The low voltage inputs (less than 60 V dc) use passive termination assemblies. Inputs for FBM207 are voltage monitor types. Voltage monitor inputs require an external field voltage source. Contact sense inputs use the FBM auxiliary +24 V dc or +48 V dc, supplied to all input channels on the assembly, to wet field contacts.

A load may not be required for proper operation of the input channels. A diode may be required for a dc inductive load only.

High Voltage Discrete Inputs

The high voltage input circuits support 125 V dc, 120 V ac, or 240 V ac. Inputs can be either voltage monitor or switched types. Voltage monitor inputs require a field voltage source. Switch inputs use customer supplied excitation voltage applied to dedicated terminals on the termination assembly and distributed on the termination assembly to each of the input channels.

To condition signals, voltage attenuation circuits are located on daughter boards mounted under the component covers of the termination assemblies.

Functional Specifications - Termination Assemblies

Table 1 - Termination Assemblies

FBM Type	Input Signal	TA Part No. ^(a)	Termination Type ^(b)	TA Cable Type ^(d)	TA Cert. Type ^(c)
		PA			
FBM207	16 channel, voltage monitor (external source) 15 to 60 V dc FBM207 channel isolation	RH916XN ^(e)	C	4	1, 2
		P0917JR ^(e)	RL		
FBM207	16 channel, voltage monitor 120 V ac or 125 V dc Logic Zero 0 to 20 V ac; 0 to 20 V dc Logic One 80 to 132 V ac; 75 to 150 V dc Input Current for Logic One; 2 mA typical FBM207 channel isolation	RH916XP ^(e)	C	4	1
		P0917JS ^(e)	RL		
FBM207	16 channel, voltage monitor 240 V ac Logic Zero 0 to 40 V ac Logic One 160 to 280 V ac Input Current for Logic One; 1.6 mA maximum FBM207 channel isolation	RH916PH	C	4	1
FBM207	16 channel, voltage monitor 120 V ac or 125 V dc with external excitation Logic Zero 0 to 20 V ac; 0 to 20 V dc Logic One 80 to 132 V ac; 75 to 150 V dc Input Current for Logic One; 2 mA typical Group isolation provided by termination assembly	RH916PK	C	4	1
		P0917JT ^(e)	RL		
FBM207	16 channel, voltage monitor 240 V AC with external excitation Logic Zero 0 to 40 V AC Logic One 160 to 280 V AC Input Current for Logic One; 1.6 mA maximum Group isolation provided by termination assembly	RH916PM	C	4	1

Table 1 - Termination Assemblies (Continued)

FBM207b	16 channel, contact sense 24 V dc contact wetting from FBM207b FBM207b channel isolation	RH916XT ^(e)	C	4	1, 2
FBM207c	16 channel, contact sense 48 V dc contact wetting from FBM207c FBM207c channel isolation	RH917MG P0917MJ ^(e)	C RL	4	1, 2

(a) PA (polyamide) termination assemblies rated from -20 to +70°C (-4 to +158°F).

(b) C = TA with compression terminals, RL = TA with ring lug terminals.

(c) Refer to *Certification for Termination Assemblies, page 13* for Termination Assembly certification definitions. To help avoid false tripping of ac type inputs, route long wiring or bundled runs to minimize coupling from adjacent signals and/or noise from heavy equipment. When possible, we recommend dc excitation of input circuits for runs greater than 305 m (1000 ft).

(d) Refer to *Termination Cable Types and Part Numbers, page 14* for cable part numbers and specifications.

(e) Polyamide RL supersedes the PVC RL, which is not a RoHS part.


Table 2 - Certification for Termination Assemblies


Type	Certification
Type 1	TAs are UL/UL-C listed as suitable for use in Class I; Groups A-D; Division 2 temperature code T4 hazardous locations. They are CENELEC (DEMKO) certified Ex nA IIC T4 for use in Zone 2 potentially explosive atmospheres.
Type 2	TAs are UL/UL-C listed for supplying field circuits Class I; Groups A-D; Division 2 hazardous locations when connected to specified 200 Series FBMs and field circuits meeting entity parameter constraints specified in <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). They are also DEMKO certified for supplying field circuits for Group IIC, Zone 2 potentially explosive atmospheres. Field circuits are also Class 2 limited energy (60 V dc, 30 V ac, 100 VA or less) if customer-supplied equipment meets Class 2.

Table 3 - Termination Cable Types and Part Numbers

Cable Length m (ft)	Type 4, 0.14 mm²/26 AWG P/PVC Cable^(a)	Type 4 LSZH^(b)
0.5 (1.6)	RH916FG	RH928BA
1.0 (3.2)	RH916FH	RH928BB
2.0 (6.6)	RH931RQ	RH928BC
3.0 (9.8)	RH916FJ	RH928BD
5.0 (16.4)	RH916FK	RH928BE
10.0 (32.8)	RH916FL	RH928BF
15.0 (49.2)	RH916FM	RH928BG
20.0 (65.6)	RH916FN	RH928BH
25.0 (82.0)	RH916FP	RH928BJ
30.0 (98.4)	RH916FQ	RH928BK
<p>^(a) P/PVC cable assemblies polyurethane outer jacket and semi-rigid PVC primary conductor insulation temperature range: -20 to +70°C (-4 to 158°F).</p> <p>^(b) Low smoke zero halogen or low smoke free of halogen (LSZH) is a material classification used for cable jacketing. LSZH is composed of thermoplastic or thermoset compounds that emit limited smoke and no halogen when exposed to high sources of heat. Temperature range: -40 to +105°C (-40 to +221°F).</p>		

Dimensions - Nominal

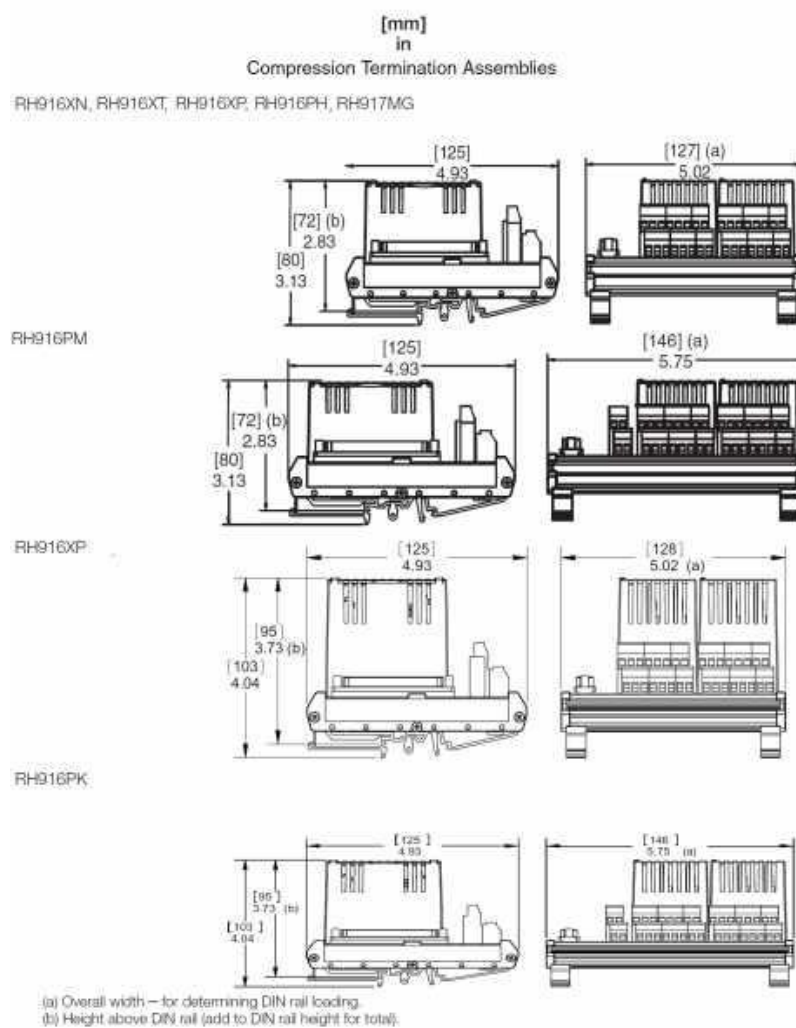

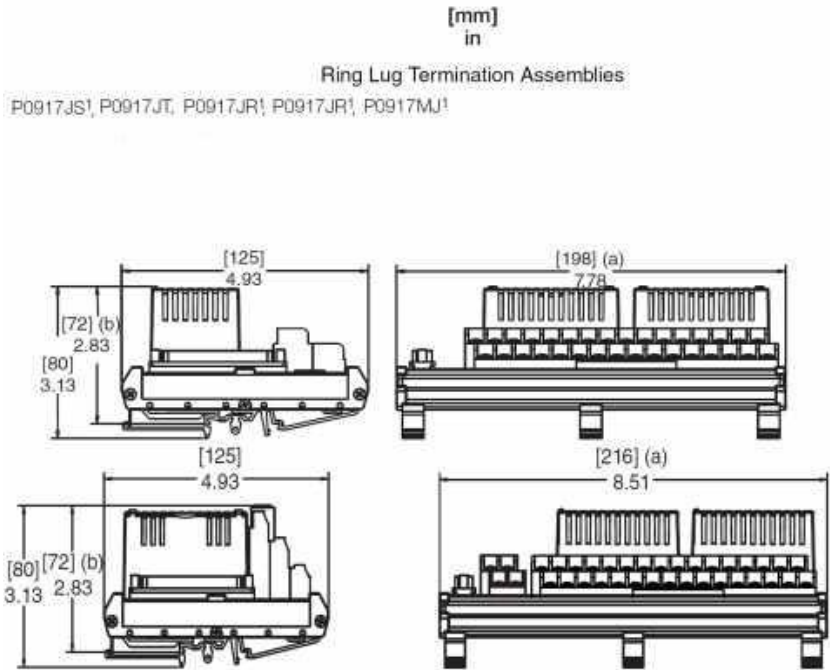

(a) Overall width — for determining DIN rail loading.
(b) Height above DIN rail (add to DIN rail height for total).

¹Dimensions shown are for the PVC versions. All dimensions for this polyamide termination assembly are smaller.
²Polyamide RL supersedes the PVC RL, note this is not a RoHS part

Related Product Documents

Document Number	Description
PSS 41H-2SOV	<i>Standard 200 Series I/O Subsystem Overview</i>
B0400FA	<i>Standard and Compact 200 Series Subsystem User's Guide</i>
PSS 41H-2SBASPLT	<i>Standard 200 Series Baseplates</i>
PSS 41H-2CERTS	<i>Standard and Compact 200 Series I/O - Agency Certifications</i>
PSS 41S-3FCPICS	<i>Field Control Processor 280 (FCP280) Integrated Control Software</i>



WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov/.

Schneider Electric Systems USA, Inc.
38 Neponset Avenue
Foxboro, Massachusetts 02035–2037
United States of America

Global Customer Support: <https://pasupport.schneider-electric.com>

As standards, specifications, and design change from time to time, please ask for confirmation of the information given in this publication.

© 2015–2019 Schneider Electric. All rights reserved.

PSS 41H-2S207, Rev A